



# Coaxial SMA Type Circulator 2000 ~ 6000 MHz

## ADC2060CSIH

### Features

- 14dB typical Isolation, 0.7dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant


### Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	2000~6000
Insertion Loss	dB Max.	1.0
Isolation	dB Min.	12.0
VSWR	Max.	1.67 : 1
Temperature	°C	10 ~ 50
FWD./REV. Power	W Max.	50/50
Input/Output Impedance	Ω	50

### Mechanical Dimensions

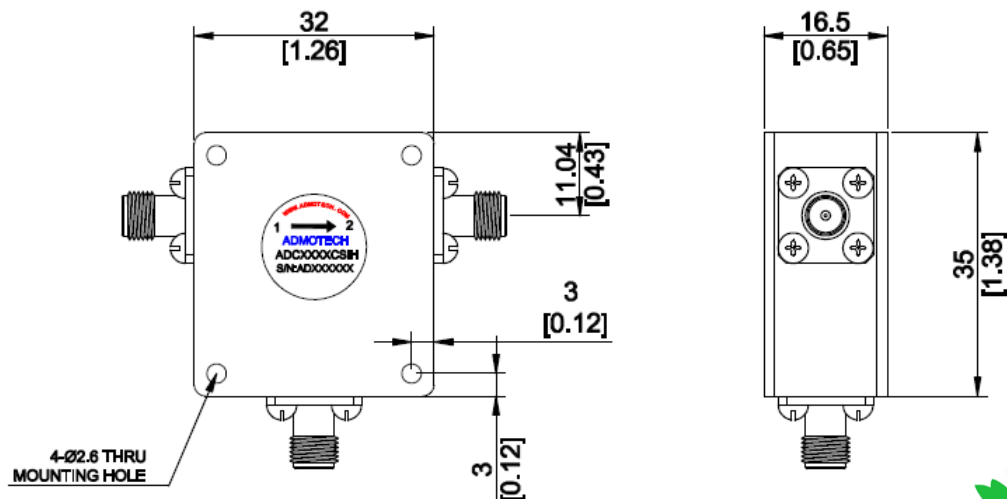

### TOP VIEW

### SIDE VIEW

unit: mm[inch]  
Tolerance: ±0.2mm



If you do not find appropriate frequency range, please contact with [sales@admotech.com](mailto:sales@admotech.com)