


# High-flexible, 50 Ohm, 18 GHz, 165°C, ø8.3 mm, Aramid jacket

## SUCOFLEX\_118\_D

### Properties

- Applicable up to 18 GHz
- Excellent insertion and return loss
- Extremely reliable and robust
- A wide range of cables, connectors and armours
- MIL qualified

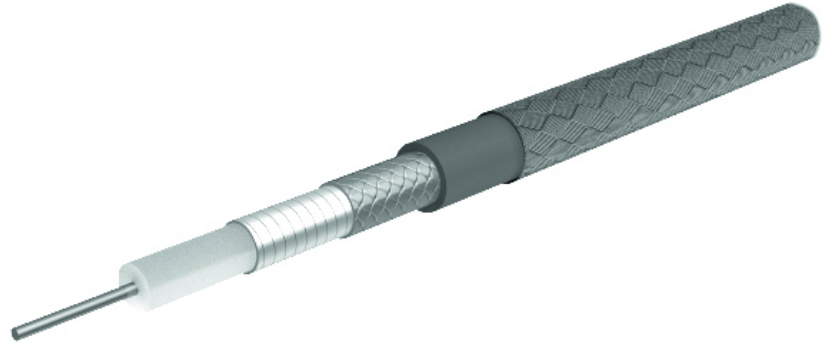

Construction			
Component	Material	Detail	Diameter
Centre conductor	Copper, Silver plated	Strand, Low-loss	
Dielectric	PTFE (Polytetrafluoroethylene)		
Outer conductor	Copper, Silver plated	Wrapped foil, 100%	
Outer conductor	Copper, Silver plated	Braid	
Jacket	FEP (Fluorinated ethylene propylene)		7.9mm
Armour	PPTA (Aramid)	RAL 9005 - bk	8.3mm

Electrical data	
Impedance	50 Ω
Operating frequency	≤ 18 GHz
Capacitance	87 pF
Velocity of signal propagation	77 %
Signal delay	4.3 ns/m
Screening effectiveness	90 dB at frequency 0.1 GHz ... 18GHz
Insulation resistance	100000000 MΩ*m
Operating Voltage (at sea level)	≤ 3.8 kV

Mechanical data	
Weight	approx. 157 g/m
Static bending radius	≥ 26 mm
Dynamic bending radius	< 45 mm

Environmental data	
Operation temperature	-55 °C ... 165°C
Fire characteristics	contains halogene

**High-flexible, 50 Ohm, 18 GHz, 165°C, ø8.3 mm, Aramid jacket**

SUCOFLEX\_118\_D

**Suitable connectors**

Cable group	U98
-------------	-----

**Ordering information**

Item number	Item description	Available as assembly only
85084786	SUCOFLEX_118_D	Yes

**Power Matrix**Calculation: typical Attenuation [ formula:  $(a \cdot f^{0.5} + b \cdot f)$  ] and maximum Power CW [ formula:  $(p/f^{0.5})$ ]

a coefficient typical =	<b>0.15</b>	b coefficient typical =	<b>0.0071</b>
fmax =	<b>18.0</b>	P at 1 GHz =	<b>1582.0</b>
<b>Frequency</b>	<b>Nom. attenuation</b>	<b>Nom. attenuation Max.</b>	<b>CW power</b>
<b>GHz</b>	<b>(dB/m)</b>	<b>(dB/ft)</b>	<b>(W)</b>
	sea level 25°C ambient temperature	sea level 25°C ambient temperature	sea level 40°C ambient temperature
0.20	0.069	0.021	3537
0.40	0.098	0.030	2501
0.60	0.120	0.037	2042
0.80	0.140	0.043	1769
1.00	0.157	0.048	1582
1.20	0.173	0.053	1444
1.40	0.187	0.057	1337
1.60	0.201	0.061	1251
1.80	0.214	0.065	1179
2.00	0.226	0.069	1119
4.00	0.328	0.100	791
6.00	0.410	0.125	646
8.00	0.481	0.147	559
10.00	0.545	0.166	500
18.00	0.764	0.233	373

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P706 / Date of publication: 27.10.2023 / uncontrolled copy