


High-flexible, 50 Ohm, 26.5 GHz, 85°C, ø5.5 mm, PUR jacket

SUCOFLEX_126_E

Properties

- Applicable up to 26.5 GHz
- Excellent insertion and return loss
- Extremely reliable and robust
- A wide range of cables, connectors and armours
- MIL qualified

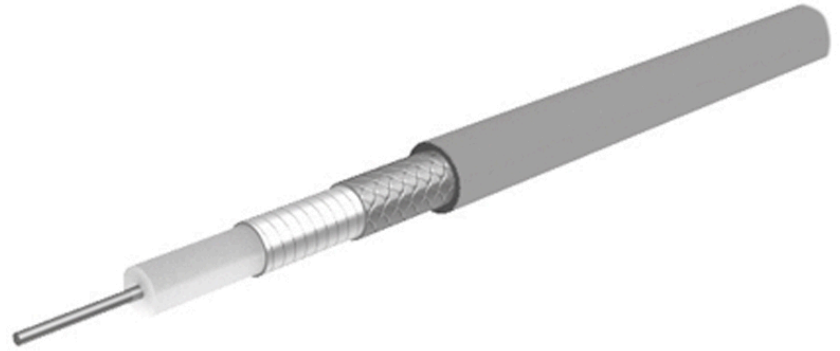

Construction			
Component	Material	Detail	Diameter
Centre conductor	Copper, Silver plated	Strand, Low-loss	
Dielectric	PTFE (Polytetrafluoroethylene)		
Outer conductor	Copper, Silver plated	Wrapped foil, 100%	
Outer conductor	Copper, Silver plated	Braid	
Jacket	PUR (Polyurethane)	RAL 5009 - bl	5.5mm

Electrical data	
Impedance	50 Ω
Operating frequency	≤ 26.5 GHz
Capacitance	87 pF
Velocity of signal propagation	77 %
Signal delay	4.3 ns/m
Screening effectiveness	90 dB at frequency 0.1 GHz ... 18GHz
Insulation resistance	100000000 MΩ*m
Operating Voltage (at sea level)	≤ 2.4 kV

Mechanical data	
Weight	approx. 66 g/m
Static bending radius	≥ 16 mm
Dynamic bending radius	< 25 mm

Environmental data	
Operation temperature	-40 °C ... 85°C
Fire characteristics	contains halogene

High-flexible, 50 Ohm, 26.5 GHz, 85°C, ø5.5 mm, PUR jacket

SUCOFLEX_126_E

Suitable connectors

Cable group	U98
-------------	-----

Ordering information

Item number	Item description	Available as assembly only
85030363	SUCOFLEX_126_E	Yes

Power MatrixCalculation: typical Attenuation [formula: $(a \cdot f^{0.5} + b \cdot f)$] and maximum Power CW [formula: $(p/f^{0.5})$]

a coefficient typical =	0.229	b coefficient typical =	0.0071
fmax =	26.5	P at 1 GHz =	600.0

Frequency GHz	Nom. attenuation (dB/m)	Nom. attenuation Max. (dB/ft)	CW power (W)
	sea level 25°C ambient temperature	sea level 25°C ambient temperature	sea level 40°C ambient temperature
0.20	0.104	0.032	1342
0.40	0.148	0.045	949
0.60	0.182	0.055	775
0.80	0.211	0.064	671
1.00	0.236	0.072	600
1.20	0.259	0.079	548
1.40	0.281	0.086	507
1.60	0.301	0.092	474
1.80	0.320	0.098	447
2.00	0.338	0.103	424
4.00	0.486	0.148	300
6.00	0.604	0.184	245
8.00	0.705	0.215	212
10.00	0.795	0.242	190
20.00	1.166	0.355	134
26.50	1.367	0.417	117

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P703 / Date of publication: 27.10.2023 / uncontrolled copy