



WR430 to N adapter 1.7~2.6 GHz

ADAWR430-N


Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	1.7~2.6
Insertion Loss	dB Max.	0.25
VSWR	Max.	1.3 : 1 @1.7~2.6 1.2 : 1 @2.4~2.5
POWER CW	W	800
Body Material	-	Aluminum
Connector type	-	N-Female
Waveguide type	-	WR430

Mechanical Dimensions

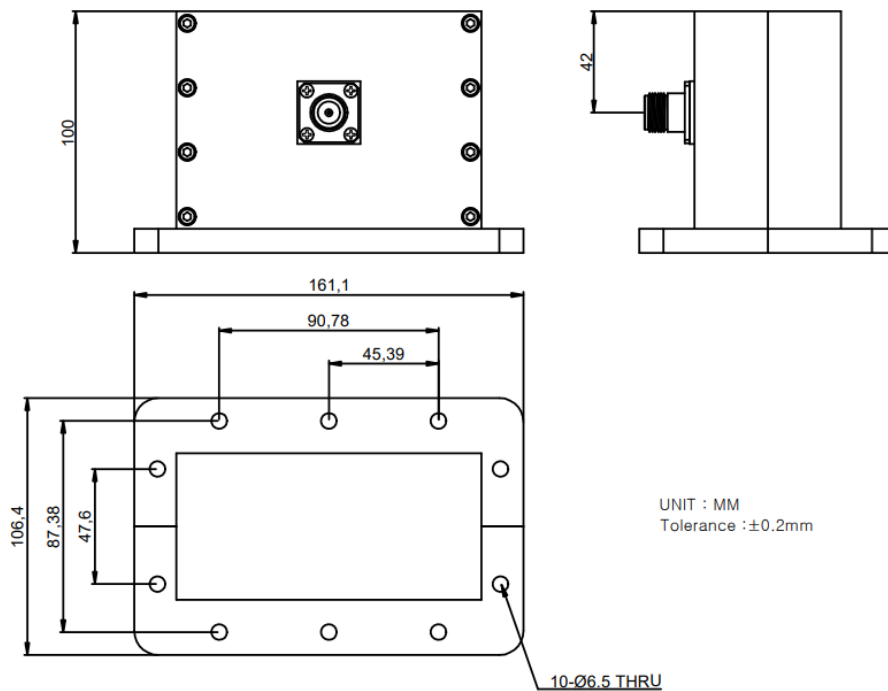

If you do not find appropriate frequency range, please contact with sales@admotech.com