


Flexible microwave cable SUCOFLEX_126

Description

SUCOFLEX 100: The flexible, high-performance microwave assemblies

High-flexible, 50 Ohm, 26.5 GHz, 165°C, ø5.5 mm, FEP jacket

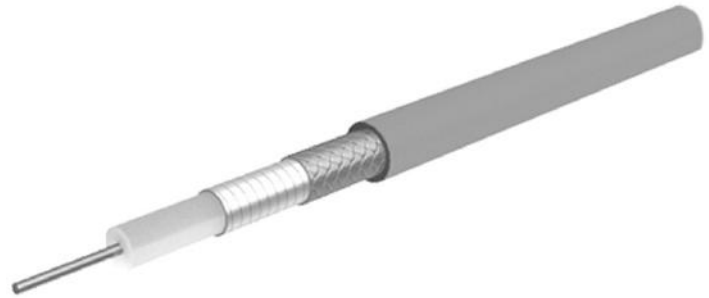

Technical Data

Construction

	Material	Detail	Diameter
Centre conductor	Copper, Silver plated	Strand, Low-loss	
Dielectric	PTFE (Polytetrafluoroethylene)		
Outer conductor	Copper, Silver plated	wrapped Foil, 100%	
Outer conductor	Copper, Silver plated	Braid	
Jacket	FEP (Fluorinated ethylene propylene)	RAL 5000 - bl	5.5 mm

Electrical Data

Impedance	50 Ω
Operating Frequency	26.5 GHz
Capacitance	87 pF/m
Velocity of signal propagation	77 %
Signal delay	4.3 ns/m
Screening effectiveness	≥ 90 dB (up to 18 GHz)
Operating voltage	≤ 2.4 kV _{rms} (at sea level)

Mechanical Data

Weight		7 kg/100 m
Min. bending radius	static	16 mm
	dynamic	25 mm

Environmental Data

Temperature range	-55 °C ... +165 °C
Flame propagation test	MIL-T-87104 § 4.6.4.8,
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

Additional Information

Ordering Information

Order as SUCOFLEX_126 (available only as assembly)

Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

Suitable Connectors

Cable group U98 SUCOFLEX

Flexible microwave cable SUCOFLEX_126

Matrix typical Attenuation [formula: $(a \cdot f^{0.5} + b \cdot f)$] and maximum Power CW [formula: $(p/f^{0.5})$]

Coefficients:

a = 0.229

b = 0.0071

$f_{max} = 26.5$

P at 1GHz = 907

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
1,32	0,27	0,083	789
2,65	0,39	0,119	557
3,97	0,48	0,148	455
5,3	0,56	0,172	394
6,62	0,64	0,194	353
7,95	0,7	0,214	322
9,28	0,76	0,233	298
10,6	0,82	0,250	279
11,92	0,88	0,267	263
13,25	0,93	0,283	249
14,58	0,98	0,298	238
15,9	1,03	0,313	227
17,22	1,07	0,327	219
18,55	1,12	0,341	211
19,88	1,16	0,354	203
21,2	1,2	0,367	197
22,52	1,25	0,380	191
23,85	1,29	0,392	186
25,18	1,33	0,405	181
26,5	1,37	0,417	176